


SERENITY SLIDE IN BATH

IMPORTANT INSTRUCTIONS FOR CUSTOMER

PLEASE READ CAREFULLY AND RETAIN FOR FURTHER USE.
IMPROPER USE OR CARE CAN INVALIDATE THE WARRANTY.

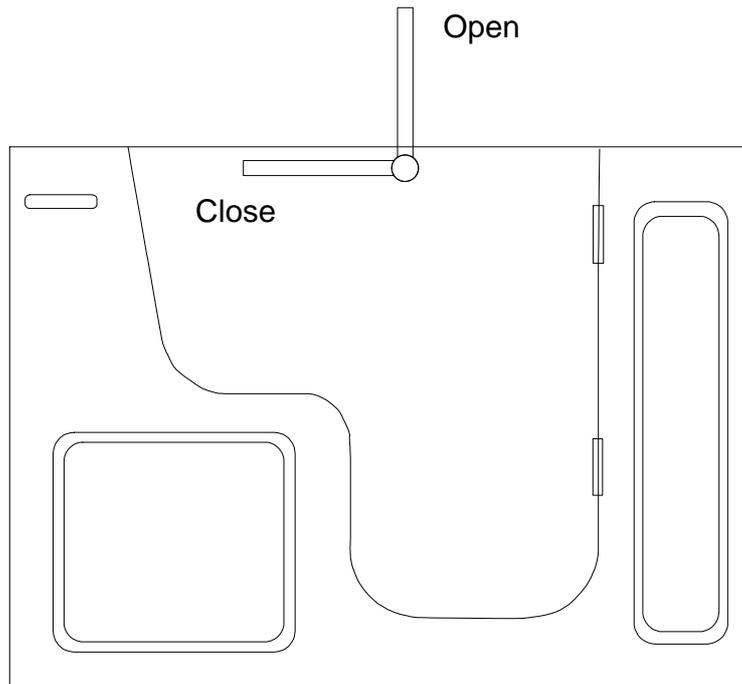

OPERATING INSTRUCTIONS

The Serenity bath features a watertight door held firmly in a locked position by means of a Bolt Catch operated by a lever activated handle. The door should always be left open when not in use to prevent wear out of the seal.

- 1) When seated in the bath plug up the waste and pull the door to close.
- 2) Pull the handle to the horizontal position to lock in the Bolt.

The bath is now watertight and ready for use.

- 3) Turn the taps on and fill the bath to desired depth.
- 4) After bathing open the waste and remain seated until all the water is completely drained away.
- 5) Pull the door handle to the vertical position.
- 6) Exit the bath and leave the door unlocked when not in use to preserve the door seal.

*** NEVER ATTEMPT TO OPEN THE DOOR WHEN BATH IS FULL OF WATER ***

*** DO NOT LEAN ON THE DOOR OR USE FOR SUPPORT ***

CARE AND MAINTENANCE

The Serenity Bath is manufactured to a very high standard in Acrylic and GRP to ensure its durability and appearance is maintained over many years of use. It has a robust, smooth and warm surface, which is non-porous, resistant to dirt and bacteria and easy to clean and maintain.

This bath will give many years of service and continue to look good if cleaned correctly and treated with care.

CLEANING

1. As with standard baths, cleaning will vary subject to the scale residue dependant on the hard or soft water level. In soft water areas, wash down with warm water and detergent applied with a soft cloth or sponge. In hard water areas, non-abrasive or mild acid cleansers can be used. Clean regularly followed by wiping with a dry soft cloth.

Widely available proprietary plastic/enamel bath cleansers are ideal cleaning agents which offer the advantage of a polished shine without rubbing down.

For the extra sparkle, and to further preserve the surface, the Bath can be gently polished occasionally. Beeswax and Brasso (Brass Polish) are suitable for this purpose.

2. The stainless steel Bolt Lock should be lubricated with a metal lubricant or with an aerosol polisher.
3. The white silicone seal along bath door sides should be cleaned occasionally. Use detergent and warm water applied with a sponge or soft cloth. Apply gently and refrain from excessive rubbing.
4. Ideally all chrome or gold plated furniture should be wiped down dry after use. Clean with soapy water and buff with a dry soft cloth. Note: Surfaces can easily be damaged with acid/abrasive cleaners or with a rough sponge.

CAUTION

- **DO NOT LOCK THE DOOR WHEN BATH IS NOT IN USE.**
LEAVE THE DOOR OPEN TO PRSERVE THE SEAL.
- **KEEP THE WHITE SILICONE SEAL FREE OF ANY BUILD UP OF DEPOSITS.**
CLEAN GENTLY AND AVOID UNNECESSARY HANDLING.
- **DO NOT APPLY ANY UNDUE FORCE TO THE BATH DOOR. HANDLE GENTLY.**



Trojan Plastics
Ramsden Mills, Britannia Road, Huddersfield,
West Yorkshire HD3 4QG

Nov 2018